




Series ALLMARINE MI-D

Volute Casing Centrifugal Pump, doublesuction, in in-line design, PN 10

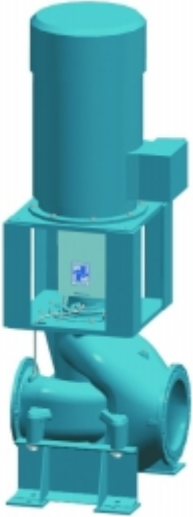

Pumped liquid

For handling fresh water, Sea water, condensate, oils

Main fields of application

Shipbuilding: fresh- and sea cooling water pump, ballast, bilge, general-service and fire-fighting pump.

Performance data Series ALLMARINE MI-D

Capacity	Q	up to 3900	m ³ /h
Delivery head	H	up to 60	m
Discharge pressure	pd	up to 10	bar
Fluid temperature	t	up to 100	°C

Construction features

- In-line design (suction and discharge branch in-line arranged)
- Pedestal mounting
- Dry installation
- Vertical installation
- Spacer coupling
- With shaft sealing
- doublesuction