


# XF5 E SYSTEM



KONGSBERG

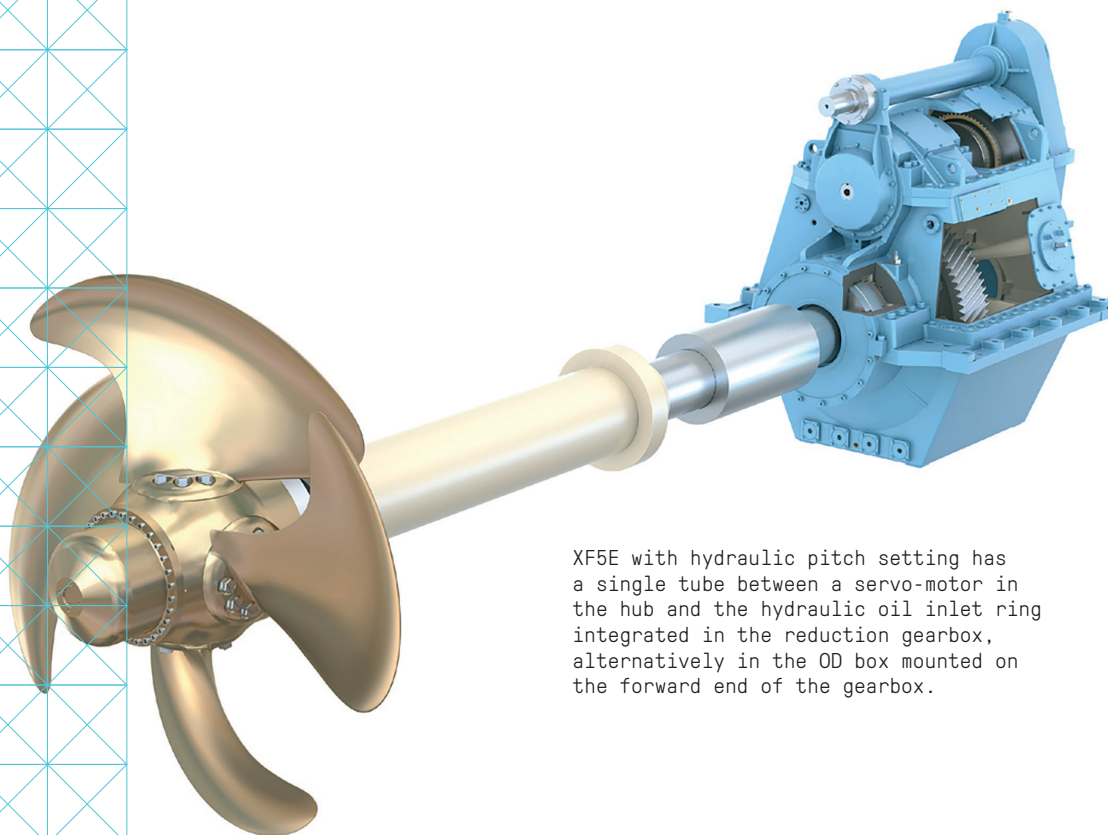

XF5E with hydraulic pitch setting has a single tube between a servo-motor in the hub and the hydraulic oil inlet ring integrated in the reduction gearbox, alternatively in the OD box mounted on the forward end of the gearbox.

## TYPICAL APPLICATIONS

Suitable for

- offshore supply vessels
- fishing vessels
- ferries
- tugs
- cargo vessels/tankers
- naval support vessels

## KONGSBERG CONTROLLABLE PITCH PROPELLERS

### XF5 E system

The XF5 E controllable pitch propeller is available in the lower power range. The system has a simple and reliable construction, including the mechanical components, hydraulics and controls. Standard and fewer components secure less maintenance, fewer and less expensive spare parts and shorter delivery time.

A tight size range guarantees optimum hub size for every application. Structurally optimised hubs mean the lowest possible stresses on the smallest possible hubs, and the highest efficiency. The system is designed with hydraulically operated pitch function.

Kongsberg Maritime  
P.O.Box 483, NO-3601  
Kongsberg, Norway

Switchboard: +47 815 73 700  
Global support 24/7: +47 33 03 24 07  
E-mail sales: [km.sales@km.kongsberg.com](mailto:km.sales@km.kongsberg.com)  
E-mail support: [km.support@km.kongsberg.com](mailto:km.support@km.kongsberg.com)