

# SELF POWERED TELEPHONE SYSTEM (BATTERYLESS)

## TELEPHONES

TYPE: SCM-BARRIER

MODEL: BA-BU-24


(Ex proof Barrier Buffer unit)

**SCM**  
SISTEMAS



### FEATURES

- II 2GD Ex e II Ex tD A21
- Intrinsically safe barrier buffer for mounting in safe area.
- 24 call output to safe area.
- 4 Outputs to Ex signal unit.
- Dimension: 400x296x200mm.
- Steel cabinet.

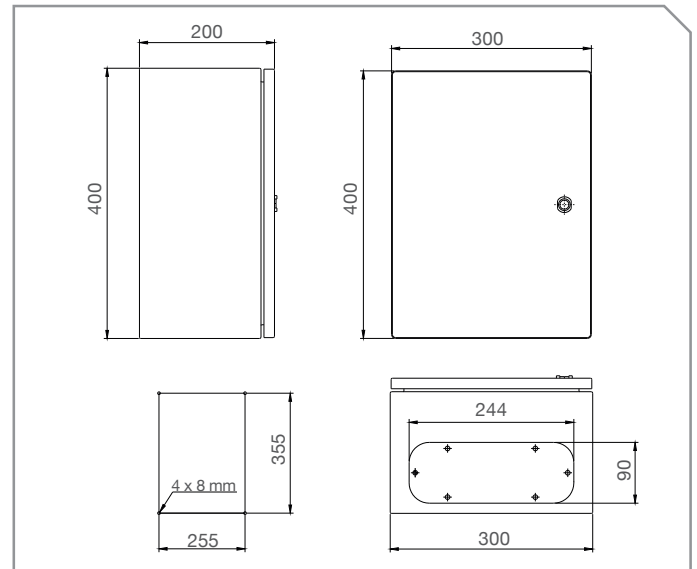

### TECHNICAL SPECIFICATIONS

|                       |                            |
|-----------------------|----------------------------|
| Power supply          | 24 VDC                     |
| Power consumption     | 100 W                      |
| Operating temperature | -20°C to +40°C             |
| Relative humidity     | Up to 95% (non condensing) |
| Weight                | Approx 12 kg               |
| IP-rating             | 65                         |